



# LDP 24-20N (25.2V 20Ah)

Lithium ion battery

Your best power choice for energy storage system!



VT Batteries Lithium ion battery solutions are more advanced, highly efficient and has many advantages over the traditional Lead Acid technology. Here introducing popular LDP 24-20N battery of VT Batteries which is high demanding among different industry users for its most advanced features.

## Application

- Wheel chair, sweeper, electric vehicle, robot
- Solar/wind energy storage system
- UPS Backup power
- Telecommunication
- Medical equipment
- Solar Street light

## Advantage summary

- Direct Lead Acid Battery (AGM/GEL) replacement for 20AH.
- Faster charge, 1 hour of charging can provide up to 90% charge (Optional)
- High energy density and conversion efficiency
- Environmental Friendly, without any heavy metals
- High cycle times and longer service life of >1500 cycles @100% DOD
- Great high temperature performance
- Safety in use: Advanced intelligent BMS inside, No explosion, No fire.
- Ultra low self discharge rate <1.5%/month
- No maintenance required through out the lifetime.
- Great power saver
- Superior DOD (100%) over lead acid batteries.
- No acid splash and carbon mono-oxide emission so no need expensive battery maintenance room.





ELECTRICAL SPECIFICATIONS	
Nominal Voltage	25.2 V
Nominal Capacity	20 Ah
Capacity @ 0.5C	120 min
Energy	504 Wh
Resistance	≤50 mΩ
Self Discharge	<1.5% Per Month
Maximum Modules In Series	Up to 25 (50.4V)


CHARGE SPECIFICATIONS	
Recommended Charge Current	4 A
Maximum Charge Current	10 A
Recommended Charge Voltage	29.4 V-29.8 V
BMS Charge Voltage Cut-Off	30.1 V (4.3 ±0.025 VPC) (1.1 ±0.4 s)
Reconnect Voltage	29.4 V (4.2 ±0.05 VPC)
Charging Method	CC-CV

DISCHARGE SPECIFICATIONS	
Maximum Continuous Discharge Current	20 A
Peak Discharge Current	100 A (<5s)
Recommended Low Voltage Disconnect	21 V (3.0 VPC)
BMS Discharge Voltage Cut-Off	19 V (2.7 ±0.08 VPC) (20 ±6 ms)
Reconnect Voltage	20 V (2.9 ±0.05 VPC)
Short Circuit Protection	200-600 μs

TEMPERATURE SPECIFICATIONS	
Discharge Temperature	- 4 °F to 140 °F (-20°C to 60 °C)
Charge Temperature	32 °F to 140 °F (0 °C to 60 °C)
Recommend Storage Temperature	32°F to 104 °F (0°C to 40 °C)

MECHANICAL SPECIFICATIONS	
Dimensions (L x W x H)	7.1 x 3.0 x 6.6 " 181 x 77 x 167 mm
Weight	3.2 Kg
Terminal Type	M6
Case Material	ABS
Enclosure Protection	IP55


### DIMENSIONAL SPECIFICATIONS

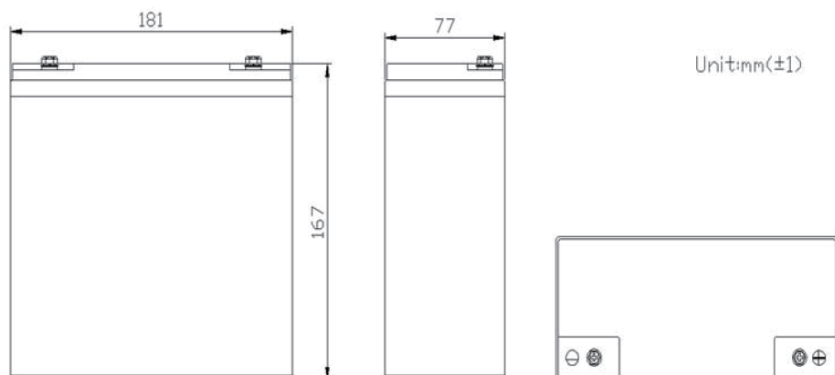




## Performance curve


### Different Rate Discharge Curve

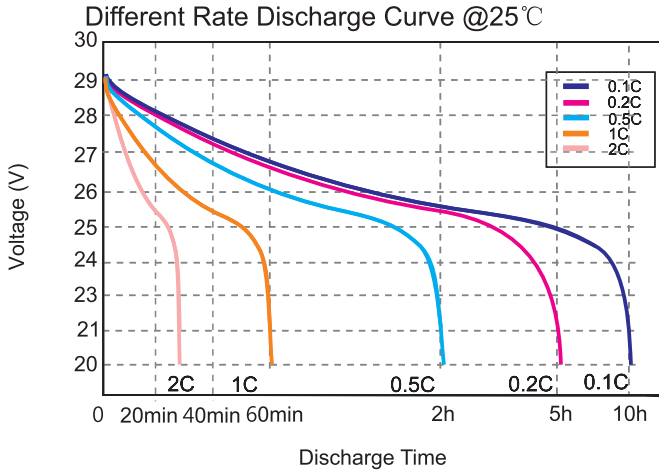


### Different Temperature Discharge Curve

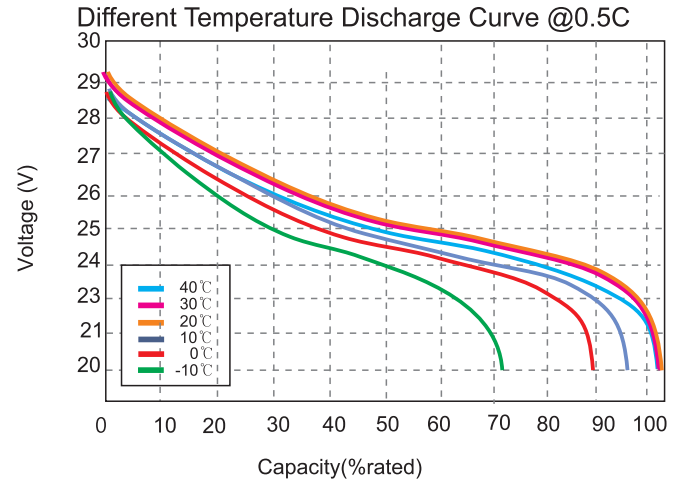


### State of Charge Characteristics Curve

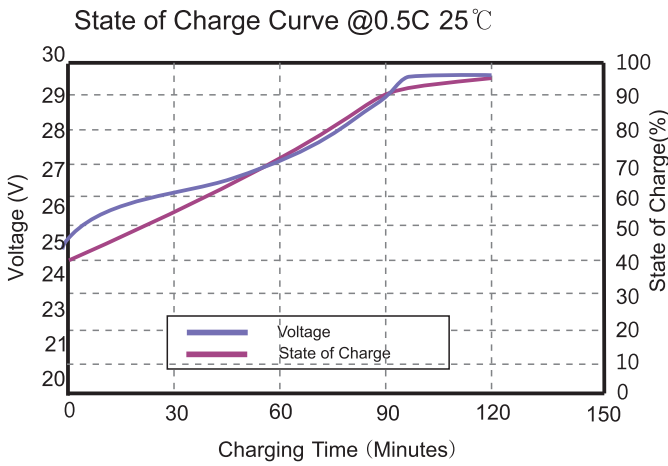

### Charging Characteristics Curve

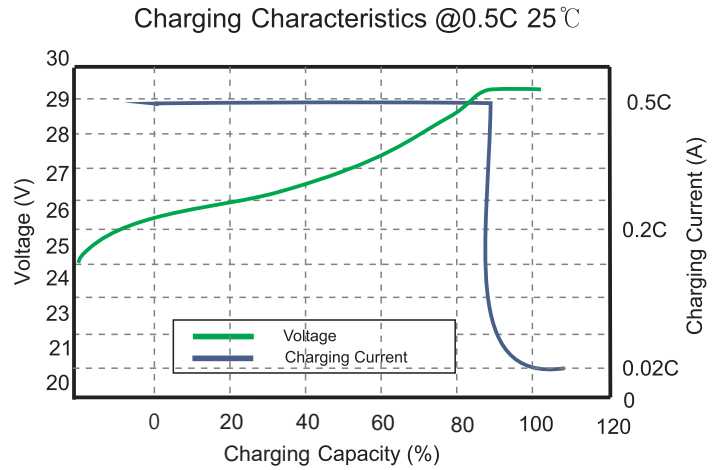

### Cycle Life Curve

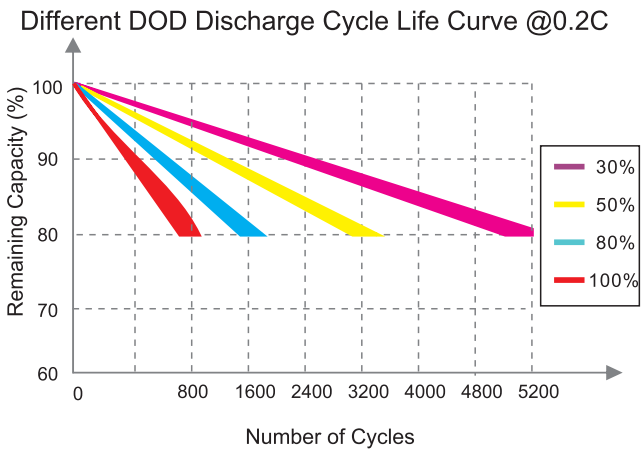

### Self Discharge Characteristics Curve

